

SD-1850

18.5" TOUCH SCREEN
MONITOR

Stability and Stylish
with VESA Wall Mount

True Flat Design
1920x1080 FULL HD



OVERVIEW

Wide viewing with 16:9 ratio

Interface: USB-C , USB , VGA or HDMI

Projective capacitive touch as option

Compact and suitable for POS solution

Flexible Mounting to VESA75 and VESA100 Wall Mount




SD-1850 TOUCH SCREEN MONITOR

SPECIFICATION

		SD1850	SD1850C	SD1850M
Display Size		18.5 inch (16:9)		
Interface		HDMI + VGA	USB-C(ALT Mode) + HDMI	USB-C + DP + HDMI + VGA
Resolution		1920x1080		
Power Source		DC 12V Adapter (2000mA)	USB-C : Power by USB-C HDMI : DC 12V Adapter (2000mA)	USB-C : Power by USB-C HDMI/DP/VGA : DC 12V Adapter (2000mA)
Power Consumption		12V / 1.6A	USB-C : 18W HDMI : DC 12V / 1.5A	USB-C : 18W HDMI/DP/VGA : DC 12V / 1.5A
Active Area		408.96(H) x 230.04(V)mm		
Display Type		TFT-LCD (Wide viewing angle)		
Back Light		LED		
White Luminance		380 cd/m2		
Contrast Ratio		1000		
Response Time Tr+Tf		20 msec		
Viewing Angle		178° (Horizontal)/178° (Vertical)		
Operating Temperature		0°C~40°C (Operating)		
Touch (Option)	Touch Function	Projective Capacitive Multi Touch		
	Input Method	Finger		
	Interface	USB		
	Glass Type	Toughened Glass		
	Optical Characteristics	Transparency > 86%		
Physical Dimension		450.05 (W) x 275.18 (L) x 46.0 (D)mm		
VESA Mount		VESA 75 mm、 VESA 100 mm		
EMC / Safty Standards		CE, UKCA, FCC, VCCI	FCC, CE	FCC, CE

I/O TYPES

A. VGA+HDMI + DC + USB -B_type Interface

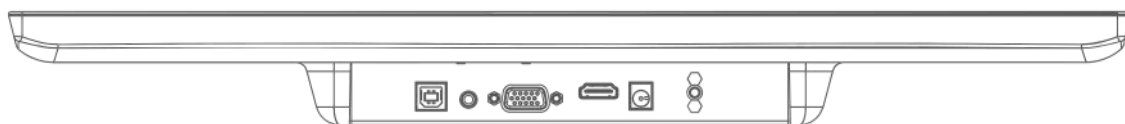

B. USB-C + DP + HDMI + VGA + DC Interface

