

A Modern Design for Modern Retail



VariPOS



The Origin of VariPOS S

The VariPOS S inherits the design DNA of the Model S, tailored for POS space efficiency and high performance. With a 14-inch full HD touchscreen featuring a 3.2mm ultra-narrow bezel, a slim 6.4mm side profile, and an elegant 11.5mm low-profile base, it achieves a significant reduction in volume while maintaining functionality and aesthetics. The device includes a built-in cooling system, a protective cover for peripherals, and an optional I/O expansion box to ensure future connectivity and upgradeability.

Following the Model S's recognition with the prestigious IF Design Award, customer feedback revealed a need for broader CPU compatibility—from entry-level models to high-end i7 processors—efficient thermal management, optional screen sizes from 15.6 to 21.5 inches, and legacy software support for 15-inch 4:3 screens. Additionally, customers requested a compact design integrating I/O ports into a single chassis for convenience and efficiency.

In response, the VariPOS S was developed to address these enhanced requirements, blending innovation, functionality, and refined design to set a new standard in POS systems.



VariPOS S Series



VariPOS S150



VariPOS S156




VariPOS S215

VariPOS S Series

+ Architecture


CPU Benchmark
By PerformanceTest 11

Customized power level &
CPU overclock by request

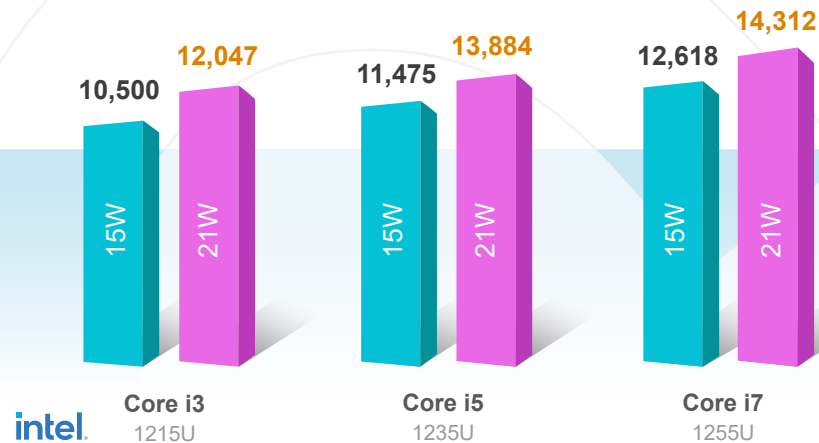

Maximized Benchmark Performance

The benchmark report highlights scalability across power levels of 15W and 21W, with fine-tuned TDP parameters enabling optimized performance. At 21W, the i3 can rival the i5 at 15W, demonstrating adaptability to diverse project requirements.

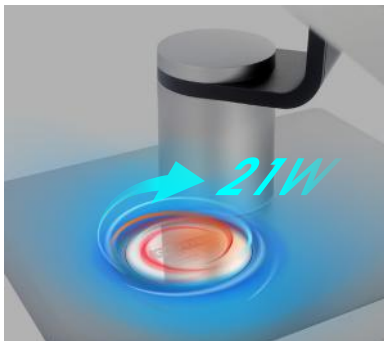

Effective Passive Cooling and Enhanced Stability

The innovative high-performance copper heat pipe and cooling disk design is capable to support 21W higher CPU TDP.



Rapid Drive Access

Dual 2.5"SSD for RAID 0/1 (PE26) or
1x DC+24v, 2x DC+12v Powered USB
+ 1 x 2.5" SSD

+ Features



Extended Display Support

Supports multiple screen sizes -10.1",15", 15.6", and 21.5"- to enhance customer interaction and engagement.



Swivelable Display

The system can be configured to allow one of the displays (front or back) to be swivelled for greater environmental compatibility.



Rotatable Display

Our modular, toolless design allows effortless switching between landscape and portrait orientations.

+ Peripherals

VariPOS S Series offers a full range of retail-ready peripherals

Payment Holder



Supports different payment terminal holders for Verifone, ingenico, PAX and many others.



PinPad



NFC

AIDC and Identity



MSR



iButton



Scanner



RFID



Fingerprint

Customer centric displays



2nd Display
10.1"/15"/15.6"/21.5"



LCM

+ Aesthetic



Stylish Aluminum Chassis

This precision-engineered aluminum chassis combines sleek aesthetics with durable, rugged protection.



Timeless Design for Modern Retail

The refined VariPOS S Series enhances retail spaces with a fresh, brand-aligned look.



Function Meets Modern Aesthetic

Designed for both form and function, the heat dissipation plate complements the terminal with a sophisticated industrial look.

+ Aesthetic



Narrow Bezel Screen Design

The displays offer a sleek modern design with slim 4.8mm bezels (\$156) housed in stylishly designed aluminum housing.



Hidden Cable Management

VariPOS S Series has been design to deliver a clean aesthetic look from every angle.



Minimalist Appearance


Neat and clean design without any redundant distraction.

+ Specification


PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE

Model		VariPOS S Series	
Main Board		PE24	PE26
Processor		Intel® Celeron® Processor J6412 (up to 2.6 GHz)	Intel® Alder Lake-P Platform i7-1255U up to 4.7 GHz i5-1235U up to 4.4 GHz i3-1215U up to 4.4 GHz
Graphic		Intel® UHD Graphics for 10th Gen Intel® Processors	Intel® Iris® Xe Graphics eligible
System memory		1 x 8GB DDR4 SO-DIMM memory (Max. support up to 16GB)	1 x 8GB DDR5 SO-DIMM memory (Max. support up to 32GB)
Storage device	HDD/SSD	M.2 Storage / 1 x SATA III (2.5", option)	M.2 Storage / 2 x SATA III (2.5", option)
	RAID Function	N/A	Option (2 x 2.5" SATA III storage)
TPM		Intel F/W TPM 2.0	
LCD size & Resolution		\$150 - 15" 4:3 @ 1024 x 768 – 400 nits landscape \$156 - 15.6" 16:9 @ 1920 x 1080 – 350 nits landscape (portrait mode-project based) \$215 - 21.5" 16:9 @ 1920 x 1080 – 250 nits landscape	
Touch screen		True-Flat PCAP multi-touch screen	
External IO ports	USB	3 x USB 3.1 / 3 x USB 2.0	
	Serial Port	2 x COM (COM1/2: RJ48 support DC+0/5/12v by BIOS setting, default setting is 0v.)	
	LAN	1 x Gigabit Ethernet by RJ-45	
	Cash drawer	1 x RJ11 Cash Drawer (Support DC+12V or +24V cash drawer. 1 x RJ11 support 2 cash drawers)	
	USB-C	1 x USB-C support PD+DP	
	DC-Jack	1 x DC-jack with lock	
	Power button	1 x power on/off button	
Expansion Slots		1 x M.2 E-Key	
Speaker		2 x 2W	
LED Indicator		1 for Power LED	
Construction		Metal Construction	
Power adaptor		DC+19V, 65watt adaptor (*w/PUSB will use 180watt adaptor)	DC+19V, 90watt adaptor (*w/PUSB will use 180watt adaptor)
Peripherals		3-Track MSR (AES/TDES Encryption) / iButton reader / RFID reader / Fingerprint reader / 2D Scanner, USB interface 2 x 20 character LCM USB interface (on the top of main screen) 10.1" 16:10 @ 1280 x 800 2nd screen, USB interface (on the top of main screen) 15" 4:3 @ 1024 x 768 – 400 nits 2nd screen for PE26 (on the rear bracket) 15.6" 16:9 @ 1920 x 1080 – 350 nits 2nd screen (Landscape or Portrait mode)for PE26(on the rear bracket) 21.5" 16:9 @ 1920 x 1080 – 250 nits 2nd screen for PE26 (on the rear bracket) PinPad Bracket for Verifone VX820, Verifone MX915, PAX A80	
Optional Configuration (Project based)		Powered USB ports (2 x DC+12v and 1 x DC+24v) or RAID 0/1 (Dual 2.5" SSD)	
Certificates		CE/FCC/LVD	
Operating environment		0°C~40°C, 10%~90% RH, non-condensing	
OS support		Windows 10/11 (64 bit), Linux (Ubuntu 22.04)	
Dimension (W x H x D mm)		\$150 - 323.7 x 339.7 x 239.7mm	\$150 - 12.7 x 13.4 x 9.4 inch
		\$156 - 358.7 x 324.9 x 226.9mm	\$156 - 14.1 x 12.8 x 8.9 inch
		\$215 - 493.9 x 365.2 x 253.4mm	\$215 - 19.4 x 14.4 x 9.9 inch
Weight (N.W. / G.W.)		\$150 - 4.6 kg / 6.2 kg	\$150 - 10.1 lb / 13.6 lb
		\$156 - 4.3 kg / 5.9 kg	\$156 - 9.4 lb / 13.0 lb
		\$215 - 7.5 kg / 9.5 kg	\$215 - 16.5 lb / 20.9 lb

IO Interface



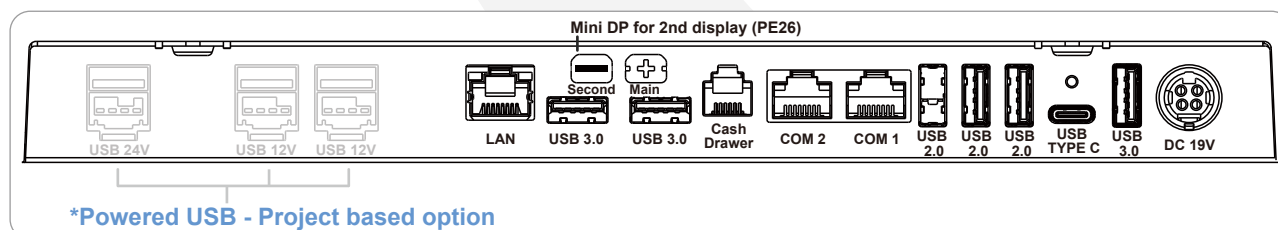


+ Configuration



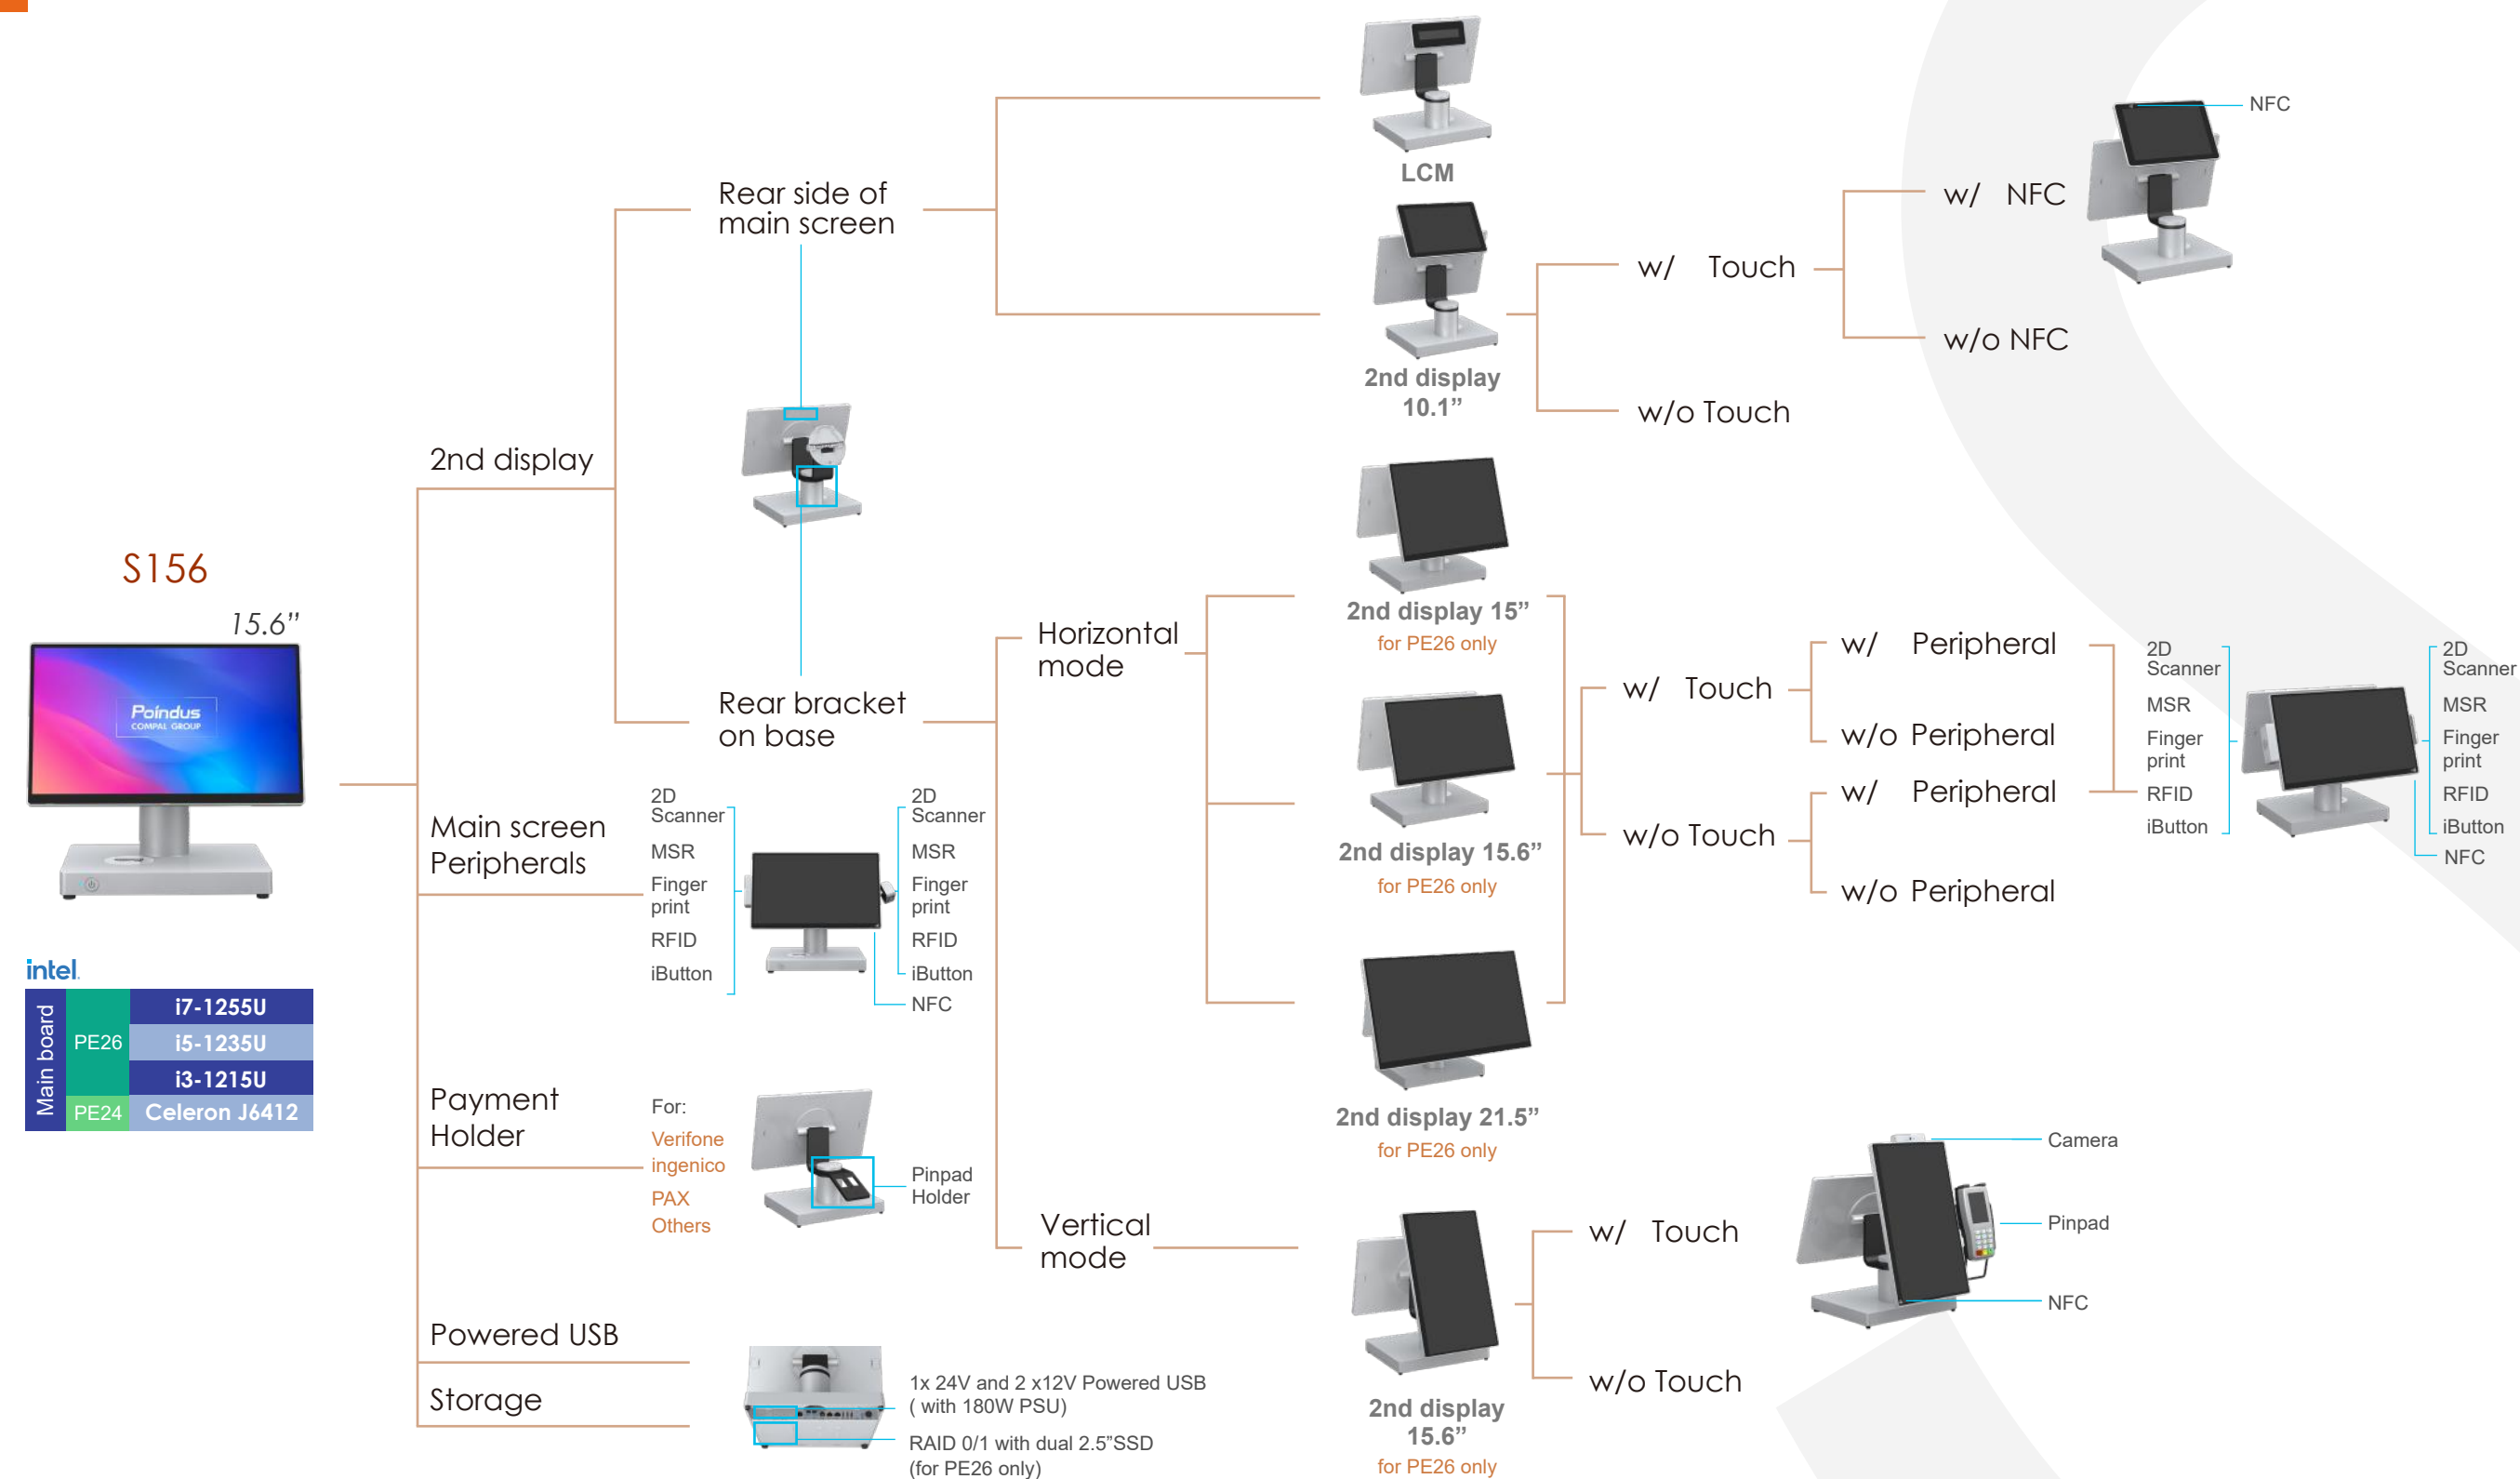


+ Dimension

S150 15"

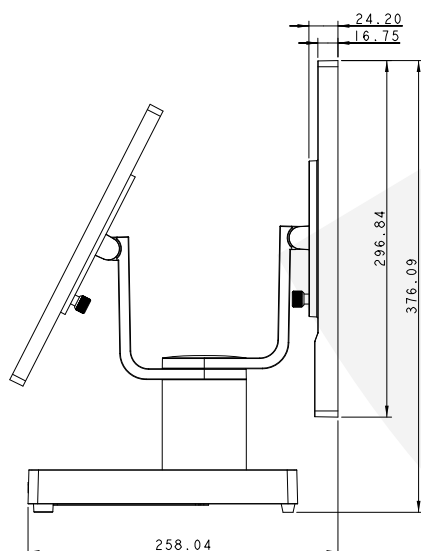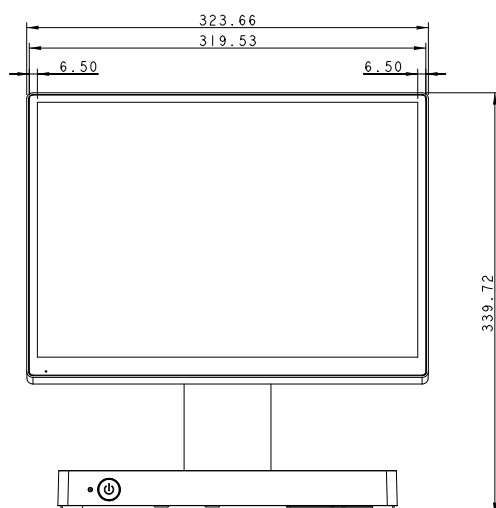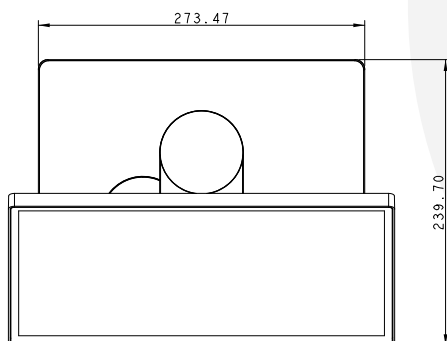

S150+21.5"2nd screen(Horizontal mode)

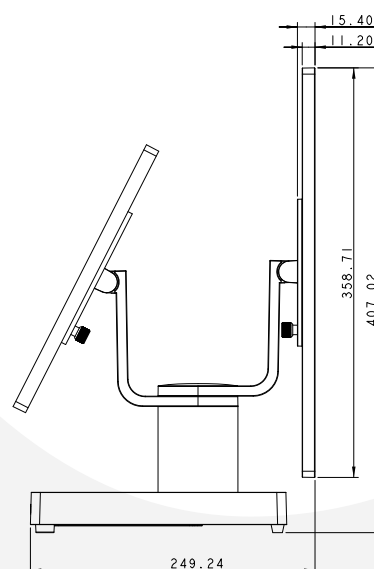
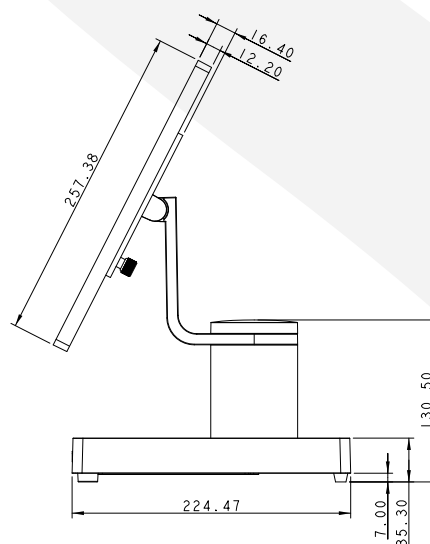
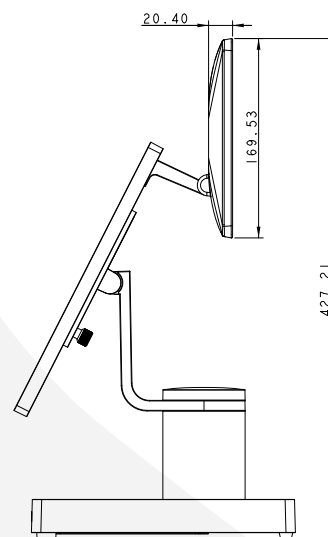


S150+15.6"2nd screen(Vertical mode)




Unit: mm

+ Dimension

S156 15.6"

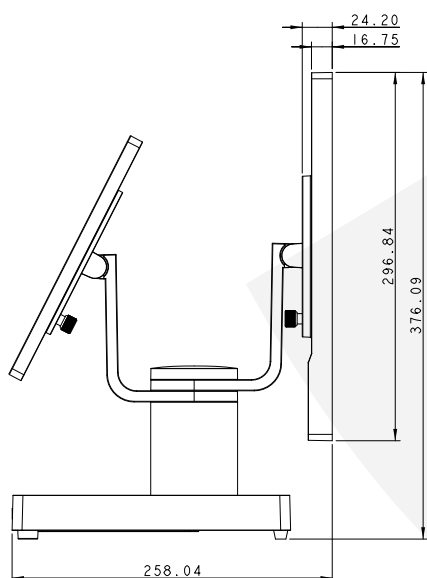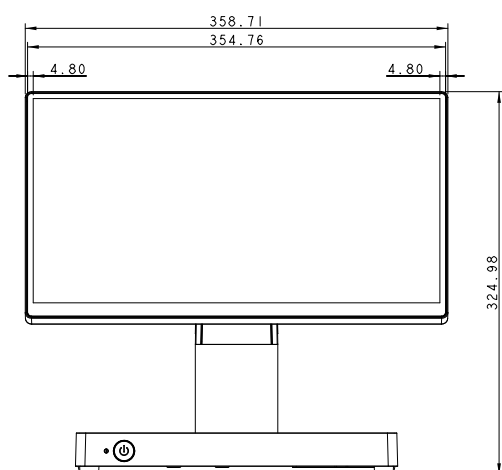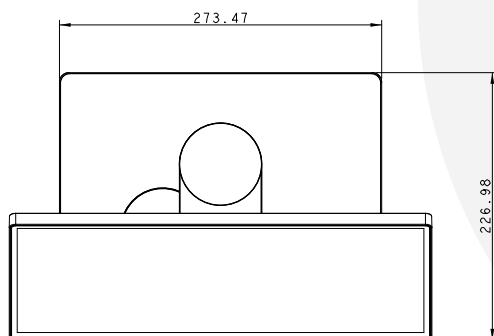

S156+21.5"2nd screen(Horizontal mode)



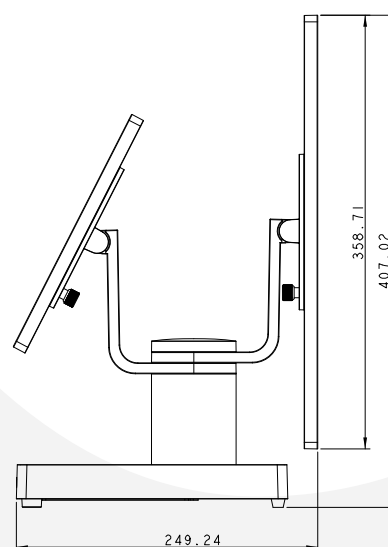
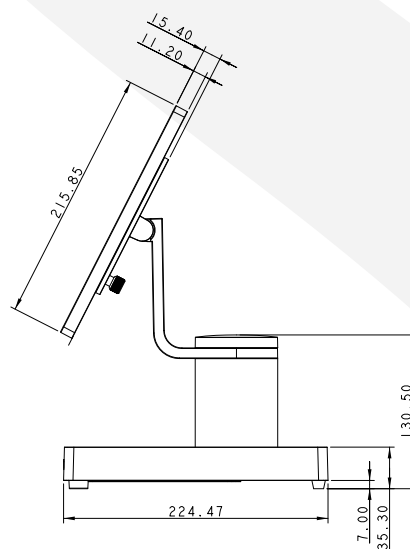
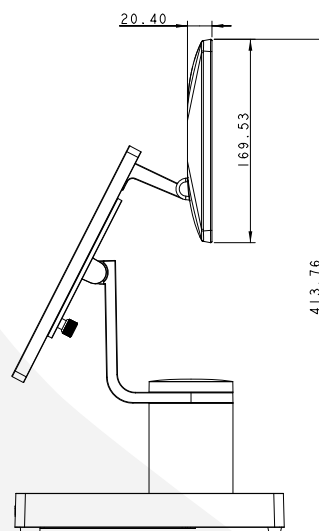


S156+15.6"2nd screen(Vertical mode)


Unit: mm

+ Dimension

S215 21.5"

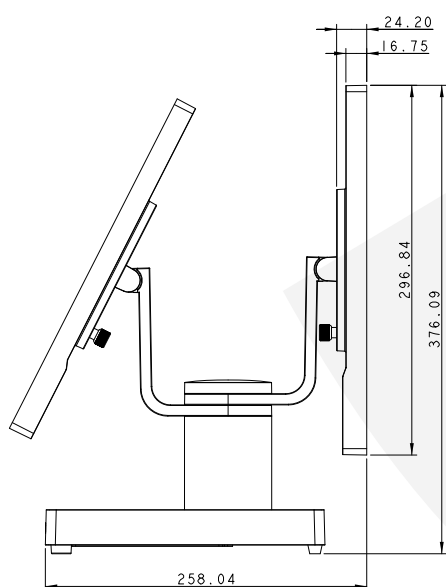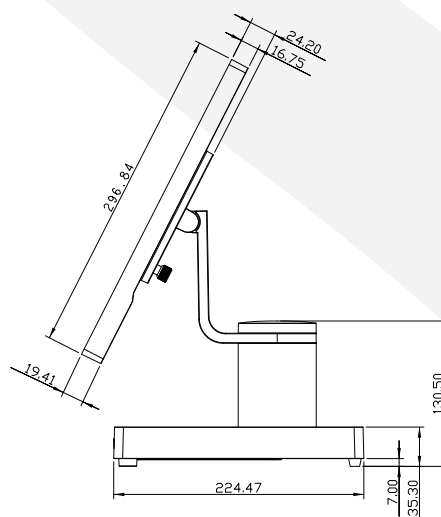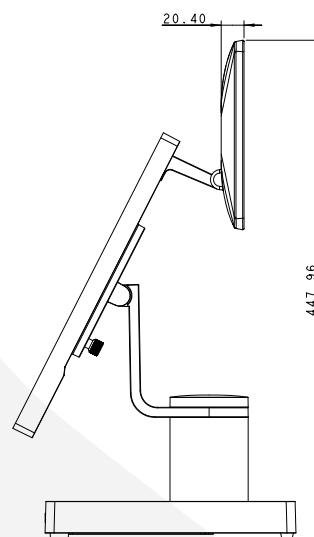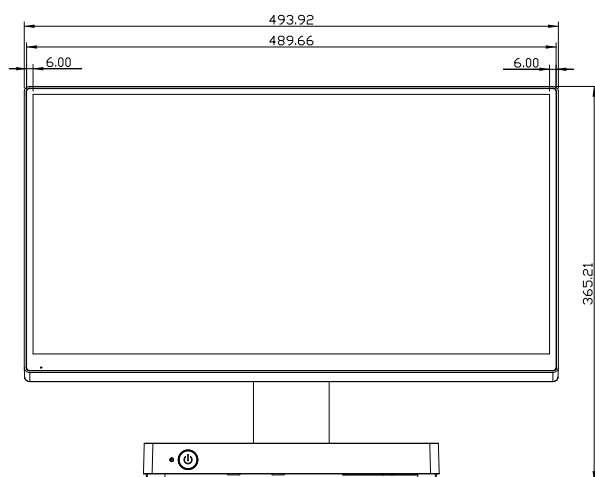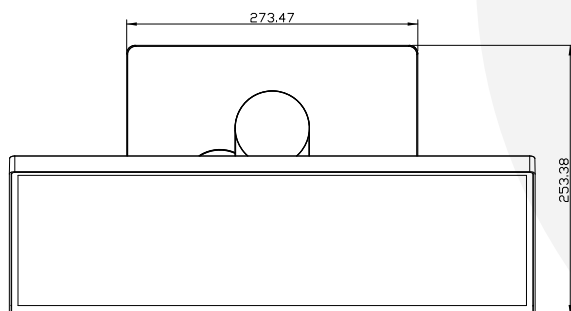

S215+21.5"2nd screen(Horizontal mode)

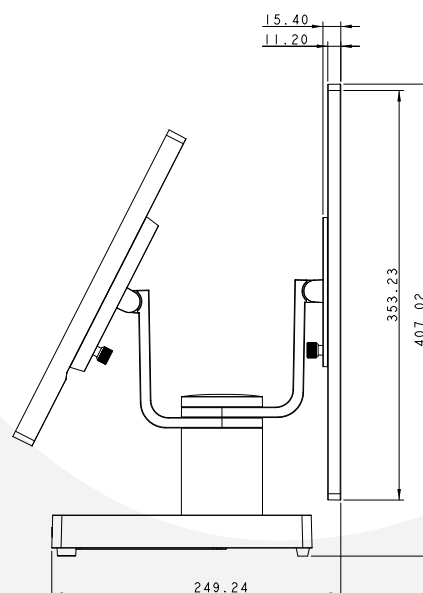

S215+15.6"2nd screen(Vertical mode)

Unit: mm

The background of the slide features a large, light gray circular graphic that resembles a stylized 'C' or a partial ring. Overlaid on this is a world map composed of a grid of small gray dots. Four specific locations are highlighted with orange dots and labeled in purple text: USA, UK, Germany, and Taiwan HQ. The Poindus COMPAL GROUP logo is centered in the upper half of the slide.

Poindus

COMPAL GROUP

USA

UK

Germany

Taiwan
HQ

Poindus Systems Corp.

Poindus
COMPAL GROUP



Poindus Systems Corp. Headquarters | www.poindus.com

5F, No.59, Ln. 77, Xing-Ai Rd., Neihu Dist., Taipei City 114, Taiwan. R.O.C.

☎ + 886 2 7721 4688

🖨 + 886 2 7721 2289

✉ + sales@poindus.com

Poindus UK

Unit 1 Osbaldwick Industrial Estate,
Outgang Lane, York, YO19 5UX, UK.

☎ + 44 1904 717180

✉ + puk@poindus.com

Poindus Germany

Max-Planck-Str. 10 70806 Kornwestheim, Deutschland

☎ + 49 7154 83000

🖨 + 49 7154 8300 599

✉ + info@adasys.de

VariPOS