
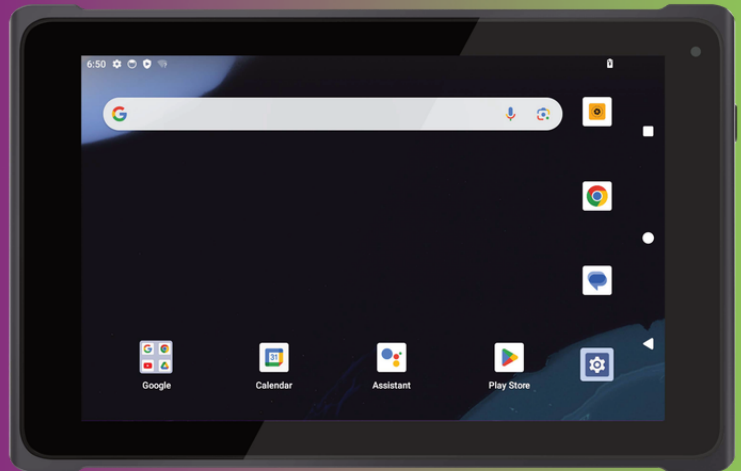


EM-T89

Rugged Tablet PC

Light Yet Limitless

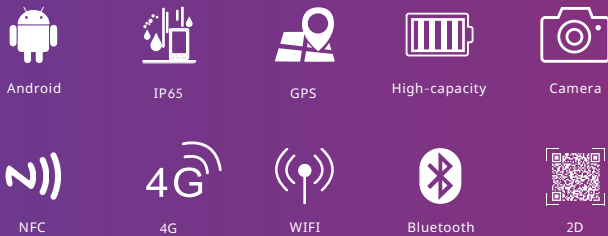

Performance

- Powered by the AIoT-specific ARM architecture octa-core processor and the latest Android 14 OS
- With 8GB of RAM and 128GB of ROM, multitasking is a breeze
- Built in 7200mAh battery, provides up to 11 hours of use on a single charge

Communication

- Dual-Band Wi-Fi5 for higher speed transmissions
- BT 5.1 with greater range and higher speed
- 4G mobile network with high quality communication level

Function

- Barcode Scanning (Optional) + NFC for diverse data collection needs
- 5MP + 13MP Dual Cameras for clear and detailed work documentation
- GPS/GLONASS/BEIDOU/Galileo/QZSS/SBAS multi-mode satellite positioning

Reliability

- All-in-one design with IML technology for scratch resistance and durability
- IP65 waterproof and dustproof, MIL-STD-810H certified
- Stable operation in extreme temperatures of -10°C to 50°C

Product Six Views



Specification Parameter

Basic parameters	
Dimension	219 x 139 x 12.5mm
Weight	524g
Device Color	Black
LCD	8 inch FHD 16:10, 1200x1920, 550nits
Touch Panel	10 point G+G capacitive touch screen
Camera	Front 5.0MP, with Light sensor Rear 13.0MP, Autofocus, Single flash
I/O	Type-C x 1 (USB 2.0/OTG/Fast charge PE+2.0 18W), SIM Card x 2, TF Card x 1,Max:512G, (Two out of three Cato) 12PIN Pogo Pin x 1
	USB Type-C interface, support fast charging PE + 2.0, Maximum Power 18W, Maximum 9V/2A.
Communication	
WiFi	WIFI 802.11 a/b/g/n/ac 2.4G+5.0G(5.1G+5.8G) Dual-band WIFI
Bluetooth	BT5.1(BLE) class 1 Transmission distance: 10m
2G/3G/4G	GSM: B2/3/5/8 WCDMA: B1/2/5/8 FDD: B1/2/3/4/5/7/8/17/20/28A/28B TDD: B38/39/40/41
GNSS	Support GPS/GLONASS/BEIDOU/Galileo/QZSS/SBAS

Performance parameter	
CPU	ARM, OCTA Core
OS	Android 14 GMS
RAM	8GB
ROM	128GB
Battery	
Capacity	3.8V/7200mAh
Type	Built-in Li-polymer battery
Endurance	11hrs (50% volume sounds, 50% screen brightness, 1080P HD video display by default)
Reliability	
Working Temp.	-10 °C ~ 50 °C
Store Temp.	-20 °C ~ 60 °C
Humidity	95% Non-Condensing
Rugged Feature	IP65 certified 、 MIL-STD-810H certified
Drop Height	1.22m
Data Collection	
2D	Optional Optical resolution: ≥3mil Code system: 1D: Code128、EAN-13、EAN-8、UPC-E、UPC-A、ISBN、ISSN、Code11、Interleaved 2 of 5、Code39、Code93、Code32、Codabar、Matrix 2 of 5、Industrial 25、IATA25、MSI Plessey、GS1 DataBar、Plessey、Febraban、Composite 2D: QR Code、Micro QR、Data Matrix、PDF417、Micro PDF417、Aztec、Maxicode、Han Xin code、Dotcode
NFC	Built-in, 13.56MHz, Support ISO/IEC 14443A/B/15693/18092 mifare protocols Card reading distance: 2.5-4cm

Accessories



Adapter(Standard)



Hand-strap(Standard)



Docking Charger (Optional)

Poindus Systems Corp. Headquarters
5F, No.59, Ln. 77, Xing-Ai Rd., Neihu Dist.,
Taipei City 114, Taiwan. R.O.C

+886 2 7721 4688

www.poindus.com

sales@poindus.com

Varlink Limited
Unit 1 Osbaldwick Industrial Estate,
Outgang Lane, York, YO19 5UX, UK.

+ 44 1904 717180

www.varlink.co.uk

ADASYS GmbH
Max-Planck-Str. 10 70806
Kornwestheim, Deutschland

+ 49 7154 83000

www.adasys.de

Poindus
COMPAL GROUP